

PARTS BREAKDOWN


NOTES:

- 1 CONNECT CLEAR "POLYETHYLENE" TUBING ON FREE FLOW SIDE (VALVE TO BUBBLER HEAD) ONLY.
- 2 REFER TO 5874SS OPERATION AND MAINTENANCE MANUAL FOR INSTALLATION INSTRUCTIONS.
- 3 MUST APPLY 1 DOT OF LOCTITE 222MS THREADLOCKER ON FEMALE THREADS OF PUSH BUTTON. SEE 5874SS OPERATION AND MAINTENANCE MANUAL (PAGE 5 OF 5) FOR PROPER APPLICATION PROCEDURE.
- 4 SEE VIEW B FOR ALTERNATE PARTS SUPPLIED WITH OPTIONAL 1311TRIMCA.
- 5 1311TRIMCA REPLACES THE STANDARD BOTTOM PLATE, PN PBM1311, AND 1 1/4 X 1 3/4 TAILPIECE, PN 0005743542, WITH BOTTOM PLATE, PN 0004544799, AND S-SHAPED WASTE BEND, PN 0000198950.

**DRIVER, NOZZLE
.25 HEX PN
0002082253
(OPTIONAL) FOR
REMOVAL OF
NOZZLE WITH TUBE**



**VIEW A
ROTATED 90° CCW
DETAIL OF 5703M**

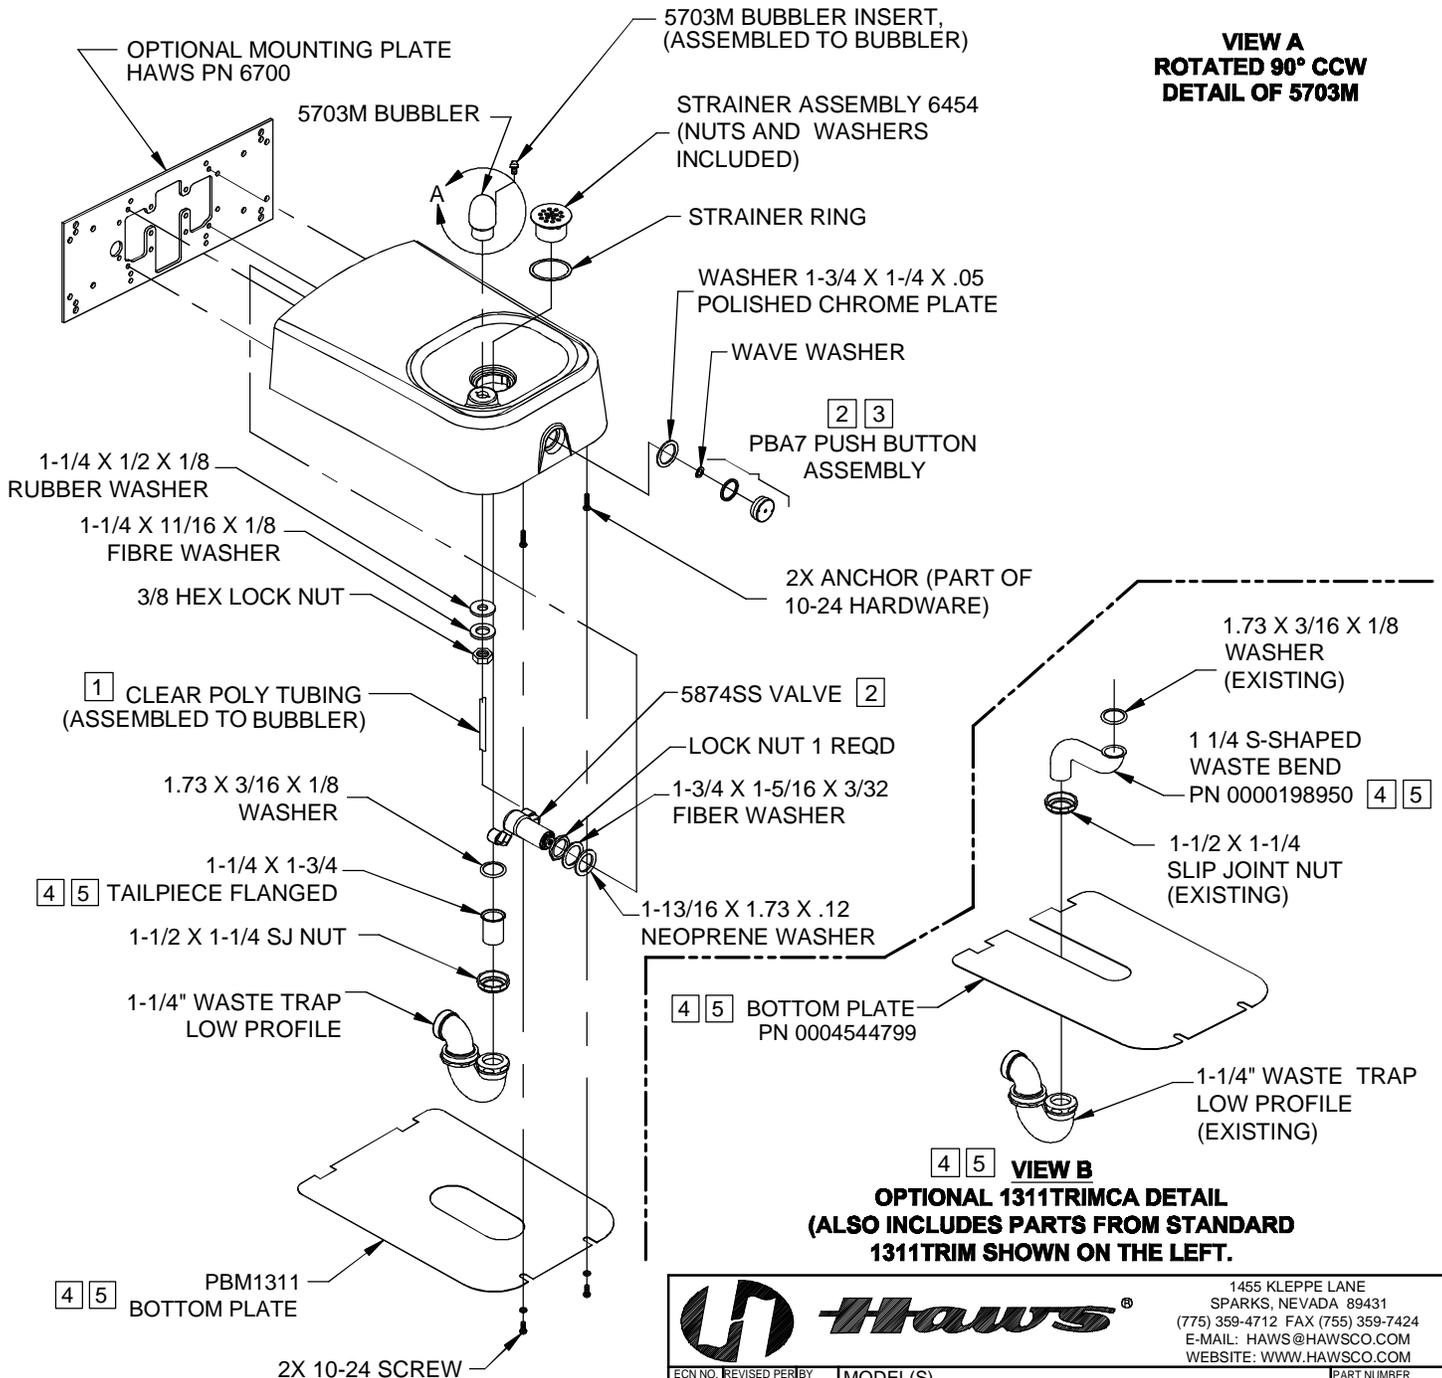

**VIEW B
OPTIONAL 1311TRIMCA DETAIL
(ALSO INCLUDES PARTS FROM STANDARD
1311TRIM SHOWN ON THE LEFT.)**



Haws

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (755) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO.	REVISED PER BY	MODEL(S)	PART NUMBER
	ECN: 4913 WVC		0002076786
DRAWN	DATE	CHKD	DRAWING NO.
A. DAY	05/01/01		14823A00
APPROVED	DATE		REV
			17

WHEN ORDERING PARTS PLEASE SPECIFY MODEL NUMBER.