



PARTS BREAKDOWN

- NOTES**
- REFER TO 5874SS/VRK5874 OPERATION AND MAINTENANCE MANUAL FOR INSTALLATION INSTRUCTIONS.
 - MUST APPLY 1 DOT OF LOCTITE 222MS THREAD-LOCKER ON FEMALE THREADS OF PUSH BUTTON. SEE 5874SS OPERATION AND MAINTENANCE MANUAL (PAGE 5 OF 5) FOR PROPER APPLICATION PROCEDURE.
 - FOR TUBING ROUTING AND LENGTHS SEE SHEET 2 OF INSTALLATION DRAWING.

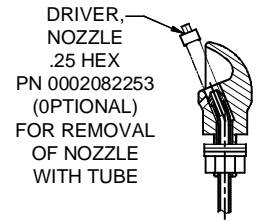

VIEW A
 ROTATED 90° CCW
 DETAIL OF 5703M

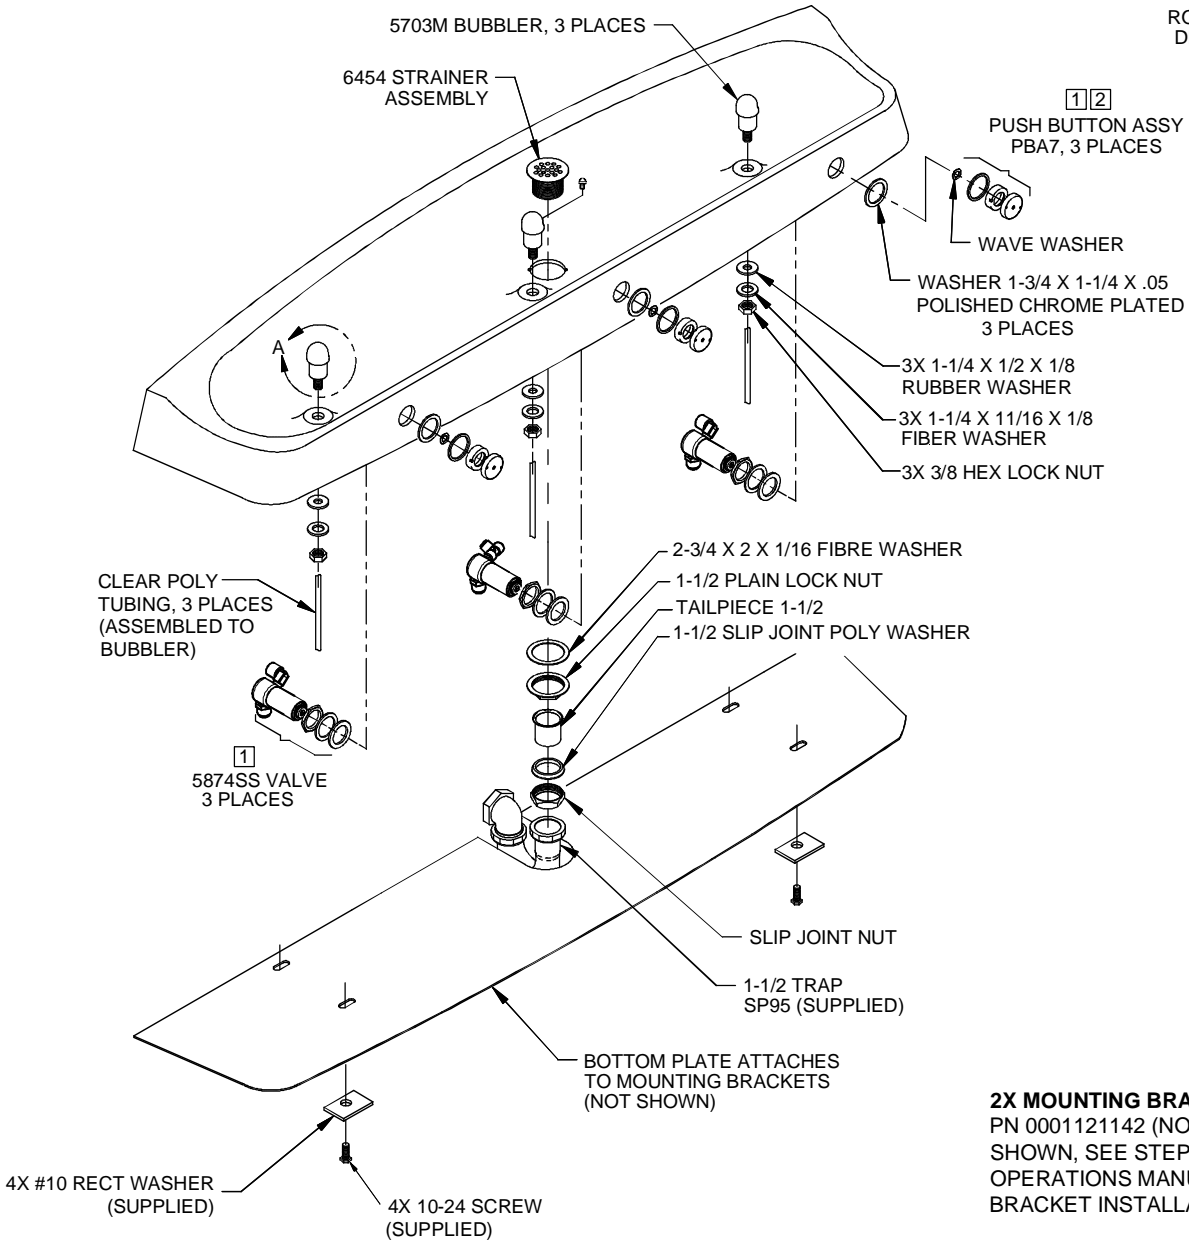

2X MOUNTING BRACKETS
 PN 0001121142 (NOT SHOWN, SEE STEP 6 OF OPERATIONS MANUAL FOR BRACKET INSTALLATION)



		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO. REVISED PER BY ECN: 4798 HM	MODEL(S) 1435 THREE BUBBLER FOUNTAIN
DRAWN D. OLLOM	DATE 08/29/97	CHKD DATE	DRAWING NO. REV 12797C00 16
WHEN ORDERING PARTS PLEASE SPECIFY MODEL NUMBER.		SCALE: 1:14	DRAWING TYPE: PARTS BREAKDOWN
APPROVED		DATE	SIZE: A SHEET 1 OF 1