



model 6518FR

Freeze Resistant Bury Valve

FEATURES & BENEFITS

YEAR-ROUND SERVICE

Reliable and fully engineered system allows the pneumatic valve to be installed below the frost line, and equipped with the ability to drain the water line after use to non-freezing depths so the unit can be used year round.

SERVICEABILITY

Operation and maintenance ease is achieved through both the adjustable stream regulation and the ability of the valve assembly to be lifted to the surface and lowered back into the casing, so in the rare event that maintenance is required, can be done without having to disturb the fountain.

OPTIONS

To see all options for this model, visit www.hawasco.com




SPECIFICATIONS

Model 6518FR freeze-resistant bury valve for use with single bubbler head pedestal fountains shall include a brass pneumatic operated valve installed below the frost line, check valve to drain water from unit when not in use and to prevent back-flow cross contamination, regulator valve, separate valve access and pull-out design for easy maintenance, 6" (15.2 cm) diameter PVC pipe to encase valve assembly, and 1/2" IPS supply.

APPLICATIONS

Freeze-resistant valve system is used in all Haws single bubbler, freeze-resistant, pedestal mounted fountains. Because this valve is installed below the frost line, it allows the fountain it is installed with to function year round in freezing conditions. Responsible for this non-freezing feat is a pneumatic operated valve that drains the water from the fountain to non-freezing depths. Haws manufactures drinking fountains and electric water coolers to be lead-free by all known definitions including NSF/ANSI Standard 61, Section 9, NSF/ANSI 372, California Proposition 65, and the Federal Safe Drinking Water Act.




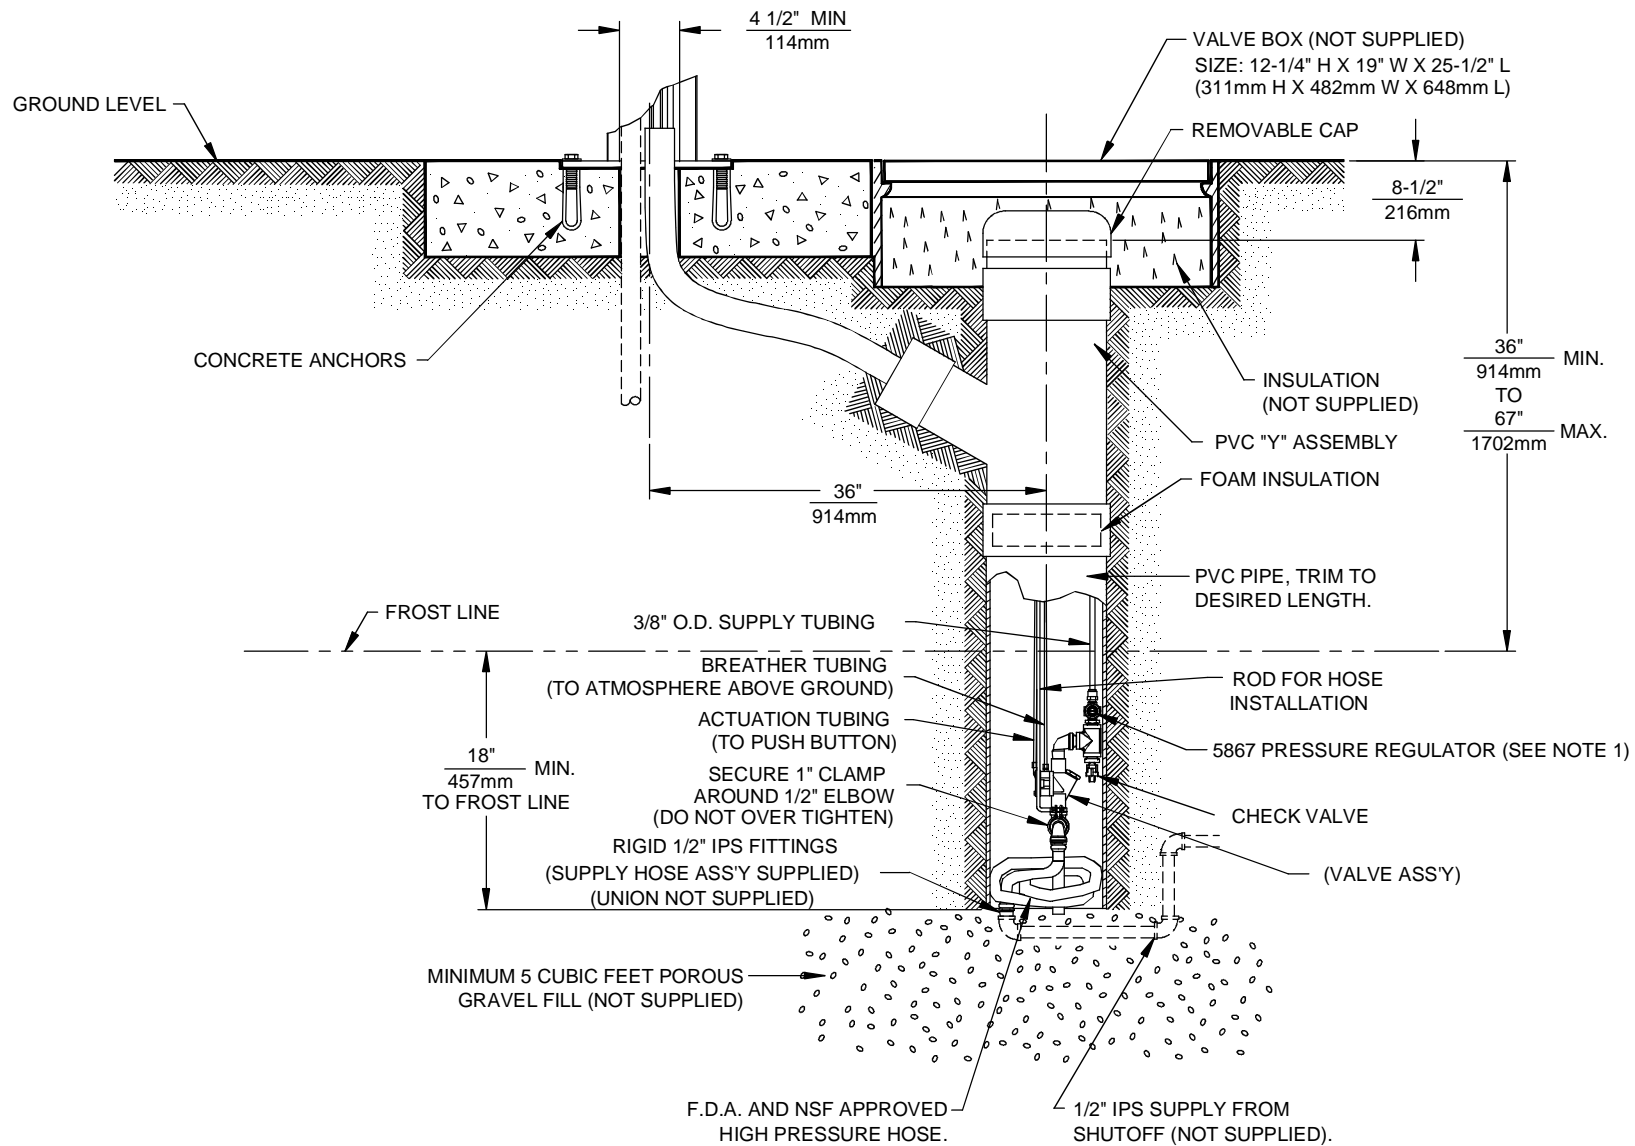


NOTE:


1. IF JUG FILLER IS TO BE ADDED, YOU MUST USE A MODEL 6518.2FR, IN THIS APPLICATION ANY FLOW CONTROL CONNECTED TO JUG FILLER MUST BE REMOVED.

		Haws [®]		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM	
				ECN NO. REVISED PER BY: MODEL(S) ECN: 4535 JDM	6518FR VALVE, FREEZE RESISTANT, SINGLE
DRAWN: TRF DATE: 12/90 APPROVED: FV	DATE: 04/21/15	CHKD.: VWC	SCALE: 1:13 DRAWING TYPE: INSTALLATION		REVISION 19
©2015 Haws Corporation - All Rights Reserved. HAWS [®] and other trademarks used in these materials are the exclusive property of Haws Corporation.				SHEET 1 OF 3	

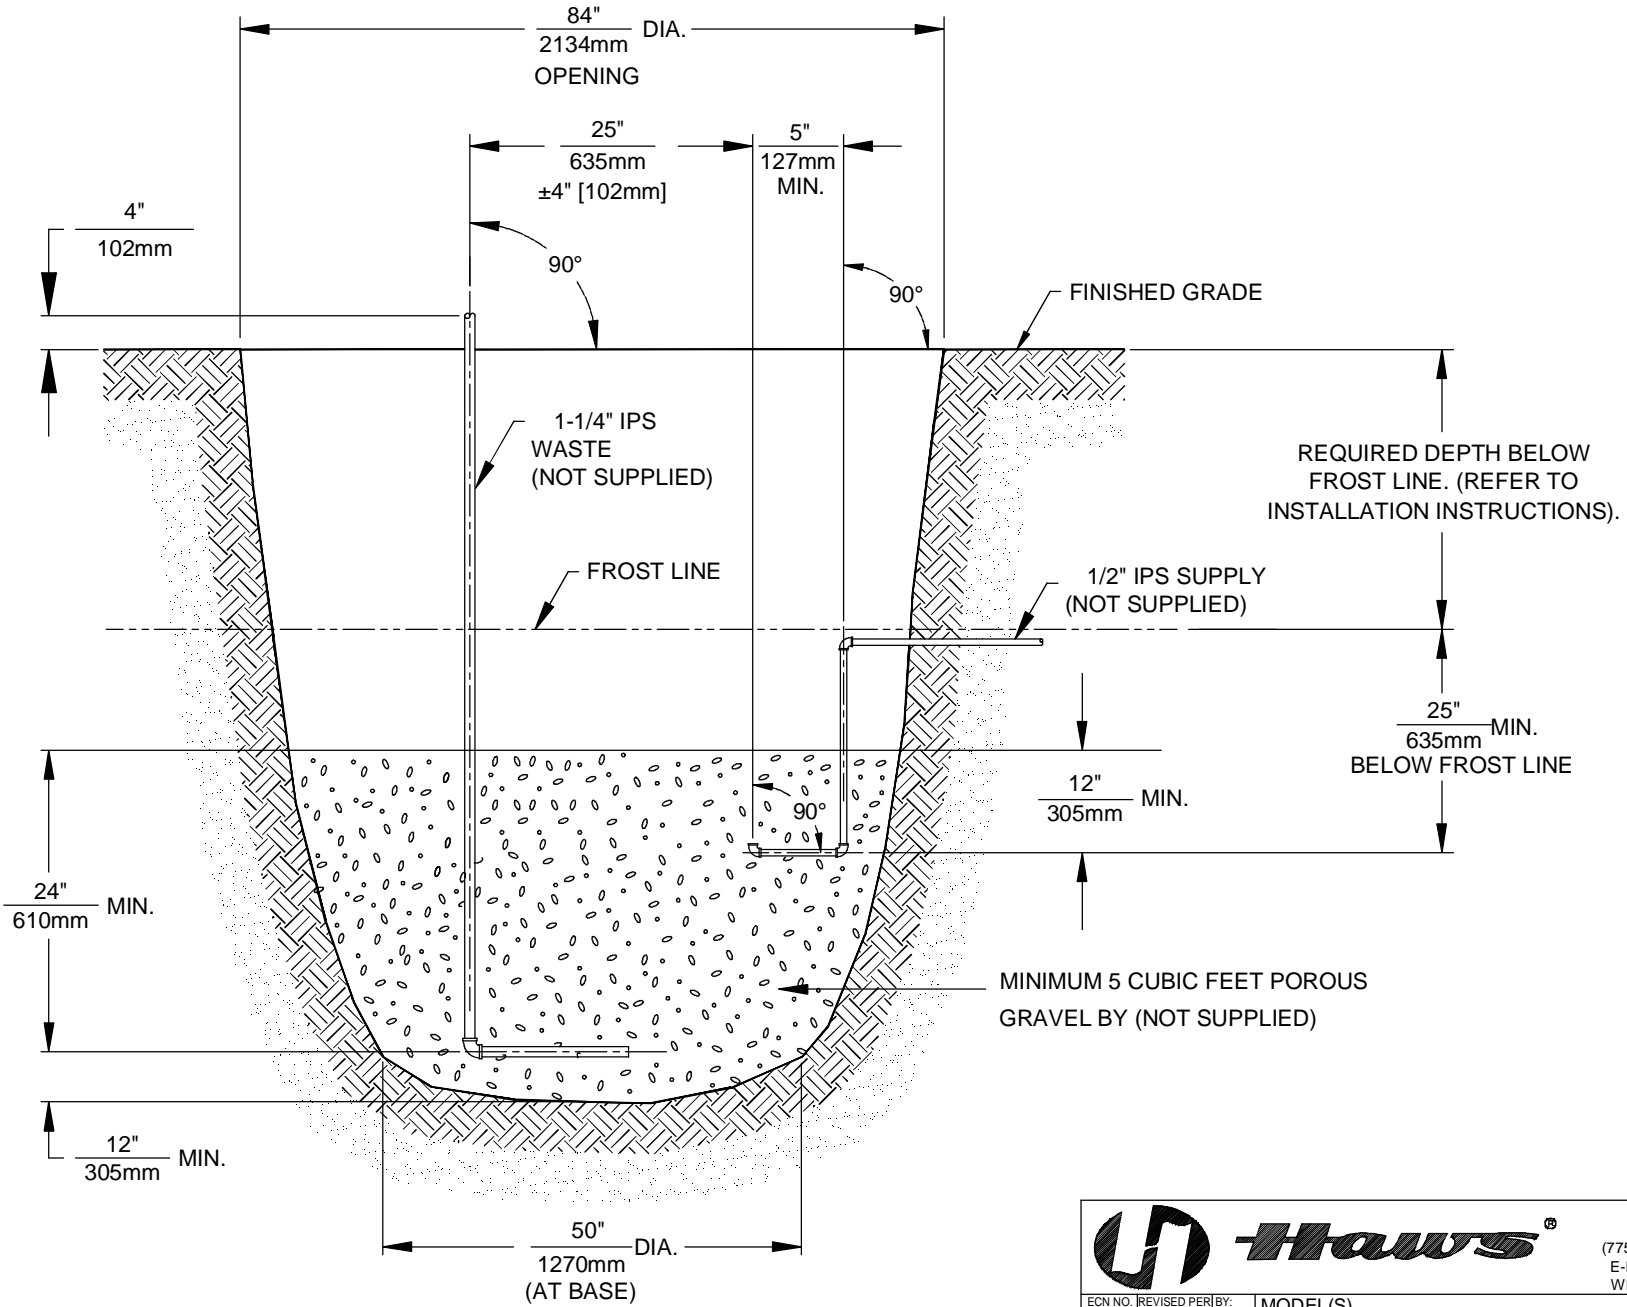

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM	
		ECN NO. REVISED PER BY: MODEL(S) ECN: 4533 JDM	6518FR VALVE, FREEZE RESISTANT, SINGLE
DRAWN: TRF DATE: 12/90 CHKD.: VWC	APPROVED: FV DATE: 04/21/15	SCALE: 1:23 DRAWING TYPE: INSTALLATION	REVISION 19 SIZE: A SHEET 2 OF 3

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

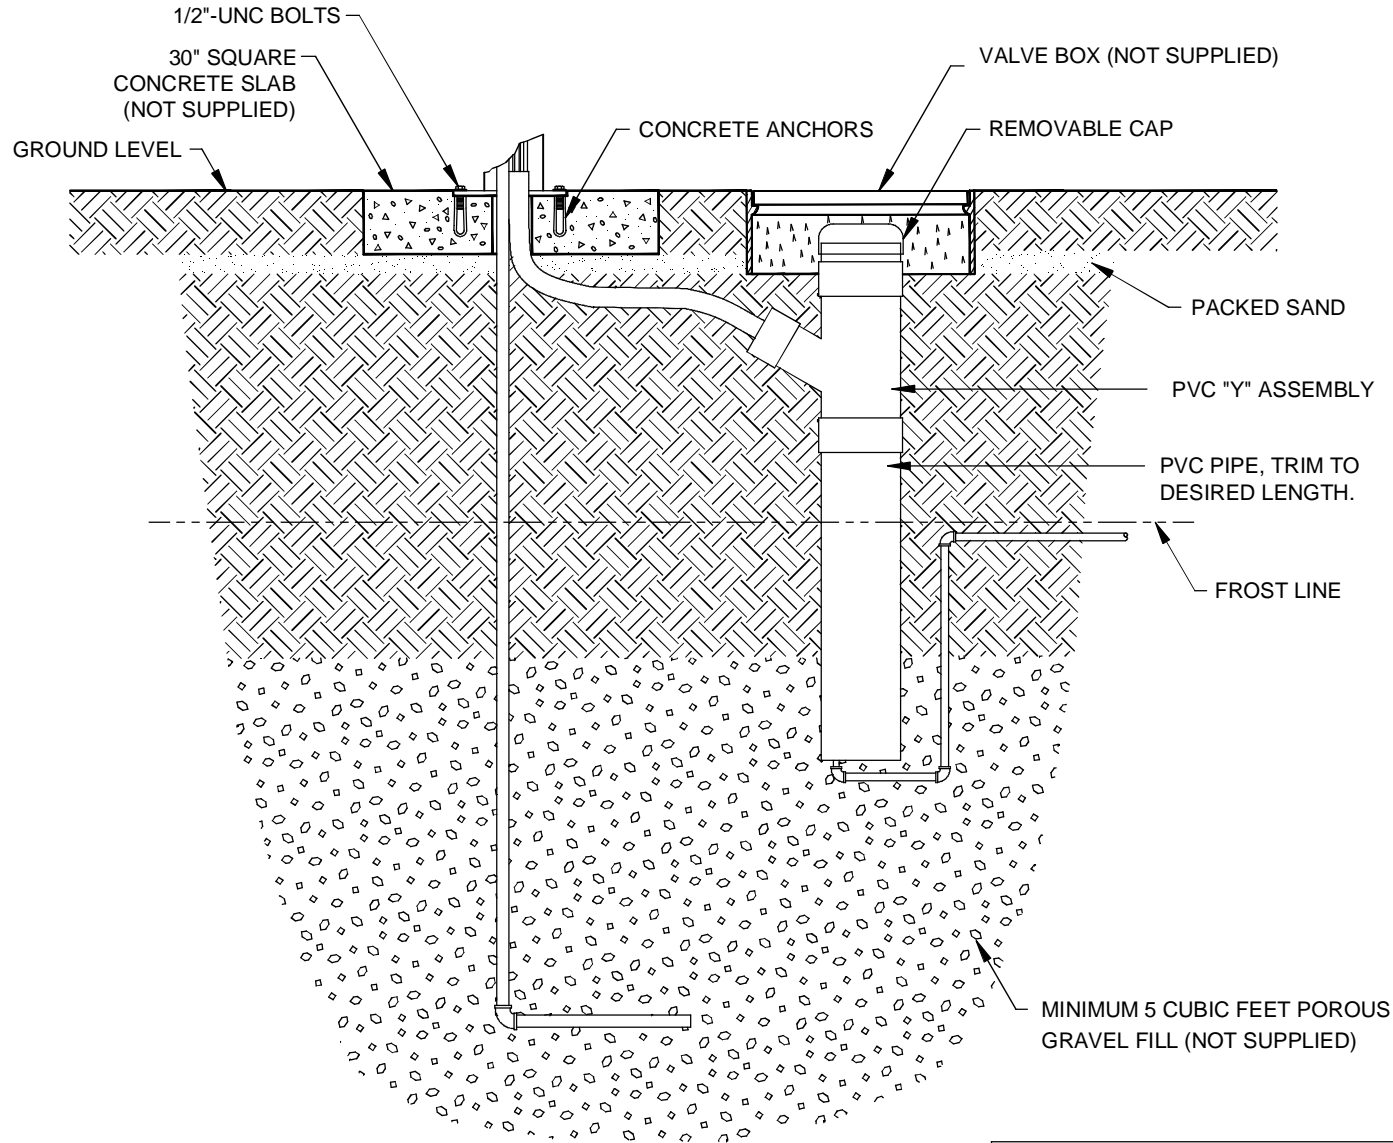

		Haws [®]		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM	
				ECN NO. REVISED PER BY: MODEL(S) ECN: 4535 JDM	PART NUMBER 000207777.D
DRAWN: TRF	DATE: 12/90	CHK'D: VWC	6518FR VALVE, FREEZE RESISTANT, SINGLE	REVISION 19	
APPROVED: FV	DATE: 04/21/15	SCALE: 1:23	DRAWING TYPE:	SHEET 3 OF 3	