

model **6**710

Mounting Plate

FEATURES & BENEFITS

OPTIONS

To see all options for this model, visit www.hawsco.com



SPECIFICATIONS


Model 6710 mounting plate shall include a 1/4" (.6 cm) steel pre-drilled and threaded mounting plate along with all-thread studs, nuts, and washers.


APPLICATIONS

Haws produces mounting plates and frames to assist in the installation process as well as to provide solid bases for the wall mounted designed fountains. Mounting plates and frames meet the requirements solely for the specified applicable fountains and are not designed to be used in the installation of any unspecified fountain.




* THESE DIMENSIONS ARE FOR STANDARD UNITS. FREEZE RESISTANT FOUNTAINS PLEASE REFER INSTRUCTIONS SUPPLIED WITH THE UNIT. TO THE

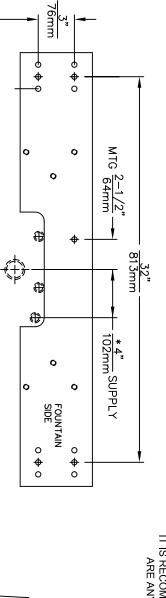



Xmm

SEE TABLE





MODEL(S):

INFO FAX: 1-888-FAX-HAWS (1-888-329-4297)
1455 Kleppe Ln, Sporks NV, 89431
Phone: 775-359-4712 Fox: 775-359-7424
Hows Ag Bachweg 3 CH-3401 Burgdorf Switzerland
Hows Mfg Pte Ltd 74 Sungei Kadut Loop Singapore 729:
e-mail: Haws@nawsco.com website: www.hawsco.co


BE CAREFUL THAT FINISHED WALL EXTENDS WITHIN THE BOWL.

PLATE AND BEHIND BOWL.

INFO FAX DOC #: 26710
SCALE: 1:8 | DRAWING TYPE: INSTALLATION/FAXBACK

AVOID COMPROMISING INTEGRITY OF WALL WHEN ANCHORING FOUNTAIN. IT IS RECOMMENDED THAT INSTALLER CALL TECHNICAL SUPPORT IF THERE DO NOT SECURE MOUNTING PLATE TO SAME SIDE OF WALL AS FOUNTAIN. ARE ANY QUESTIONS AS TO HOW TO OBTAIN A PROPER ANCHOR IN REGARDING CONCRETE/MASONRY WALL MOUNTING:

CONCRETE/MASONRY WALLS. 1-800-766-5612

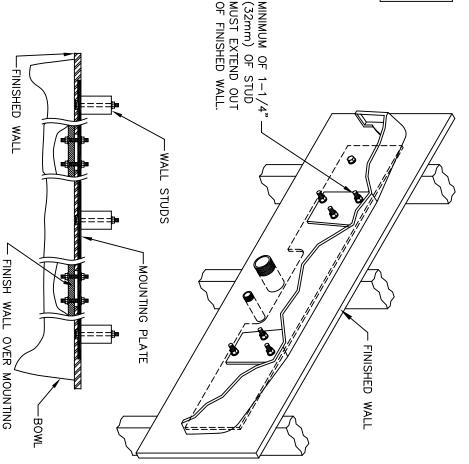

DWG. NO.10838C00

我以外的人有不明在 如下的人如此 等如

STUD

8

8

DURING ROUGH—IN TO SECURE STUDS IN PLACE. FULLY TIGHTEN NUTS

MOUNTING HARDWARE (BY OTHERS).

8

FLOOR LINE