



model 6717

Mounting Plate


FEATURES & BENEFITS

MOUNTING

3/16" (.47 cm) steel pre-drilled and threaded mounting plate along with all-thread studs, nuts, and washers provides the maximum support and facilitates easy installation for Haws 'Hi-Lo' 1117L drinking fountain.

OPTIONS

To see all options for this model, visit www.hawesco.com

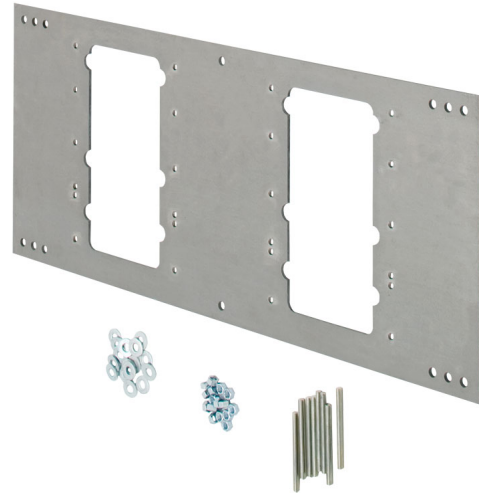

SPECIFICATIONS

Model 6717 'Hi-Lo' mounting plate for Haws fountain model 1117L shall include a 3/16" (.47 cm) steel pre-drilled and threaded mounting plate along with all-thread studs, nuts, and washers.

APPLICATIONS

Haws produces mounting plates and frames to assist in the installation process as well as to provide a solid base for the wall mounted designed fountains. Mounting plates and frames meet the requirements solely for the specified applicable fountains and are not designed to be used in the installation of any unspecified fountain.



Technical drawing of a wall-mounted unit showing dimensions and mounting hole locations. The drawing includes the following labels and dimensions:


- Dimensions:**
 - Top vertical dimension: 2 [51mm]
 - Left vertical dimension: 16 [406mm]
 - Left vertical dimension: 36 [914mm]
 - Left vertical dimension: 16 [406mm]
 - Right vertical dimension: 8 [203mm]
 - Right vertical dimension: 8 [203mm]
 - Bottom horizontal dimension: $7\frac{7}{8}$ [22mm]
 - Bottom horizontal dimension: 13 [330mm]
 - Bottom horizontal dimension: $23\frac{1}{16}$ [601mm]
 - Bottom horizontal dimension: $14\frac{3}{4}$ [375mm]
- Mounting Holes:**
 - STANDING ADULT MOUNTING HOLES (1, 2)
 - ADULT ADA MOUNTING HOLES (1, 2)
 - CHILD HEIGHT MOUNTING HOLES (1, 2)
- Other Labels:**
 - ⌀ OF WASTES AND FOUNTAINS
 - FLOOR LINE
 - WHEN INSTALLING MOUNTING FRAME ON WALL, MAKE SURE DUAL HOLES ARE TOWARD BOTTOM OF PLATE

FULLY TIGHTEN NUTS
DURING ROUGH-IN TO
SECURE STUDS IN PLACE


STUD LOCATIONS SHOWN ARE FOR
REFERENCE ONLY. REFER TO
NOTE 2 FOR PROPER LOCATION
BASED ON APPLICATION

REGARDING CONCRETE/MASONRY WALL MOUNTING:
DO NOT SECURE MOUNTING PLATE TO SAME SIDE OF WALL AS FOUNTAIN. AVOID
COMPROMISING INTEGRITY OF WALL WHEN ANCHORING FOUNTAIN. IT IS
RECOMMENDED THAT INSTALLER CALL TECHNICAL SUPPORT IF THERE ARE ANY
QUESTIONS AS TO HOW TO OBTAIN A PROPER ANCHOR IN CONCRETE/MASONRY
WALLS. 1-800-766-5612

1. SEE 1117L INSTALLATION DRAWING (SHEET 1) FOR PLUMBING ROUGH-IN DIMENSIONS
2. SEE 1117L INSTALLATION DRAWING (SHEET 2) FOR DETAILED FOUNTAIN MOUNTING POSITIONS.

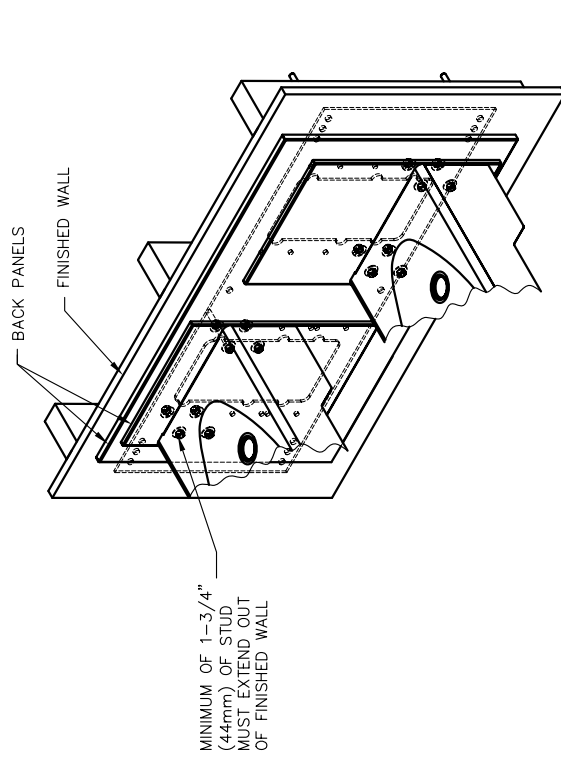


MINIMUM OF 1-3/4"
(44mm) OF STUD
MUST EXTEND OUT
OF FINISHED WALL

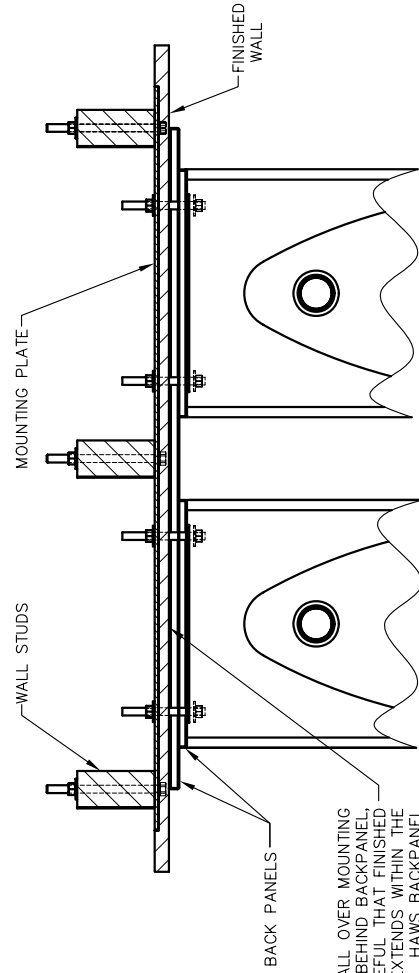

FINISH WALL OVER MOUNTING
PLATE AND BEHIND BACKPANEL,
BE CAREFUL THAT FINISHED
WALL EXTENDS WITHIN THE
HAWS BACKPANEL

INFO FAX : 1-888-FAX-HAWS (1-888-329-4297)
1455 Kleppe Ln, Sparks NV, 89431
Phone: 775-359-4712 Fax: 775-359-7424
Haws Ag Bachweg 3 CH-3401 Burgdorf Switzerland
Haws Mfg Pte Ltd 74 Sungai Kadut Loop Singapore 729905
e-mail: www.hawasco.com website: www.hawasco.com



ECR NO. 3899	REVISED PER ECN:	BY:	MODEL(S): 6717
DRAWING: C.FENNER12-12-06	DATE:	CHK'D:	INFO FAX
APPROVED:	DATE:		

DATE:	INFO FAX DOC #:	10/27/2000
APPROVED:	SCALE: 1:1	DRAWING TYPE: INSTALLATION/FAXBACK
		SIZE: A SHT. 1 OF 1

©2006 Haws Corporation - All Rights Reserved HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.