



model SP154DPDT

Flow Switch

FEATURES & BENEFITS

CONSTRUCTION

Solid brass body construction, explosion proof electrical box, and wire push-in connection terminals.

OPTIONS

To see all options for this model, visit www.hawasco.com



SPECIFICATIONS

Model SP154DPDT is a flow switch for use with the 9001 and 9001EXP alarms. Switch will activate at 2.4 gallons (9 L) per minute of flow. AC, 125/250 volts, 5 amps, double pole, double throw. 1-1/4" FIPS inlet and outlet. Class 1, Division 1, Group B, C, D. UL Listed.

APPLICATIONS

Model SP154DPDT flow switch is suitable for a number of emergency applications where water flow detection is needed to alert the appropriate entities of a possible serious situation.



NOTE:

DASHED LINES DENOTE FIELD PIPING.

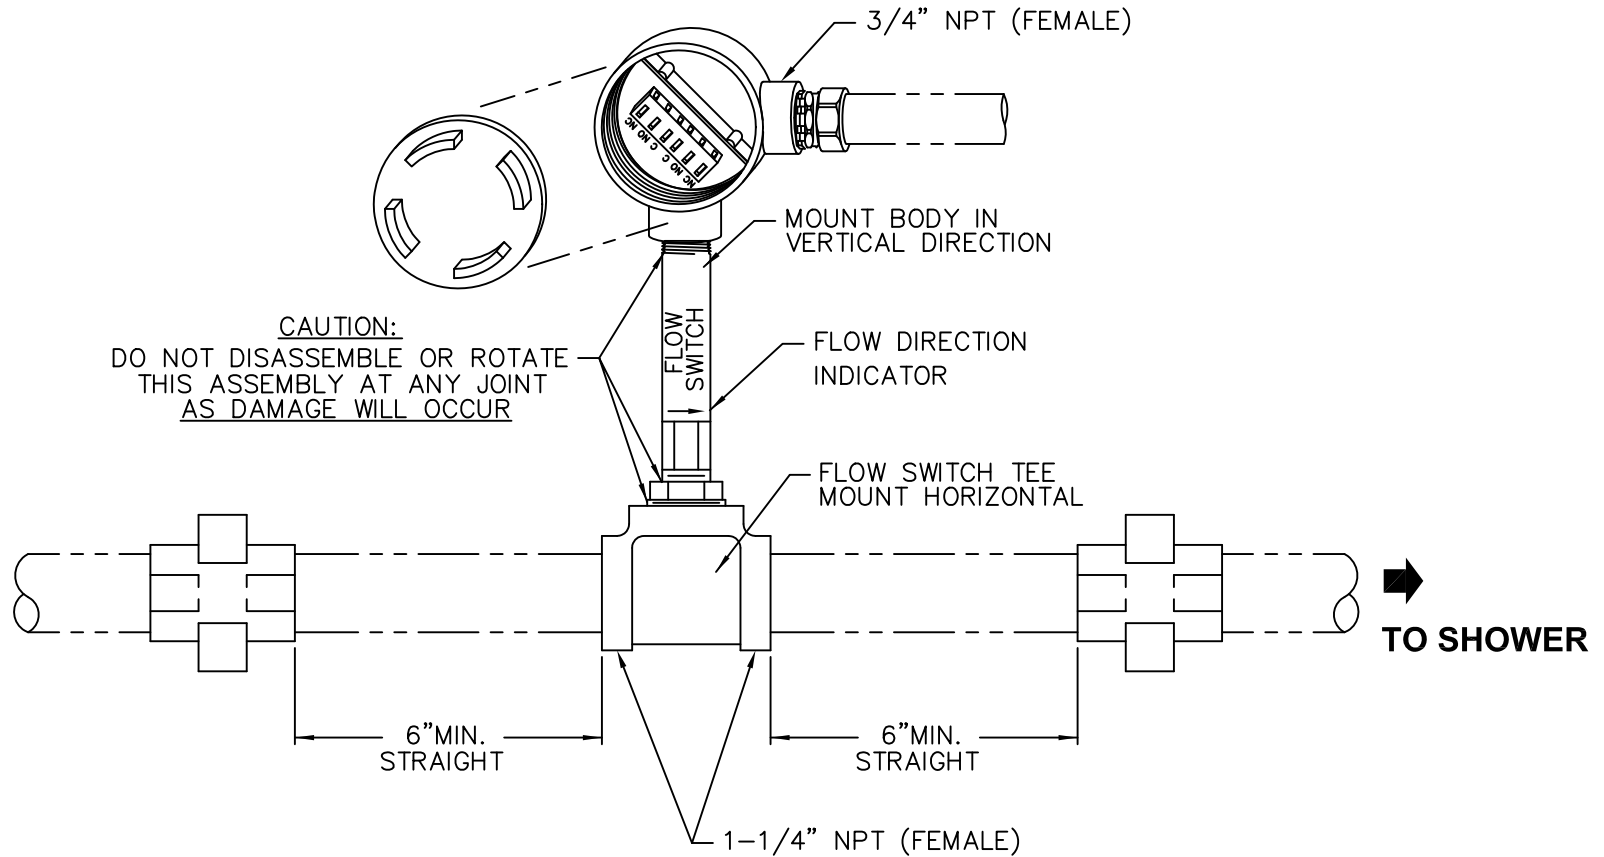



FIGURE 1

		INFO FAX : 1-888-FAX-HAWS (1-888-329-4297) 1455 Kleppe Ln, Sparks NV, 89431 Phone: 775-359-4712 Fax: 775-359-7424 Haws Ag Bachweg 3 CH-3401 Burgdorf Switzerland Haws Mfg Pte Ltd 74 Sungei Kadut Loop Singapore 729531 e-mail: Haws@hawsco.com website: www.hawsco.com	
		ECR NO. REVISED PER BY: ECN: 3890 J/F DRAWN: DATE: 13/06/97 CHKD.: APPROVED: DATE:	MODEL(S): SP154DPDT INFO FAX DOC #: 2SP154DPDT SCALE: 1:4 DRAWING TYPE: INSTALLATION/FAXBACK

DWG. NO. 12918C00